


Replacing Brushes in Kress Router Motor


Remove the Cover from the rear of the motor by removing 2 off T10 Torx screws.

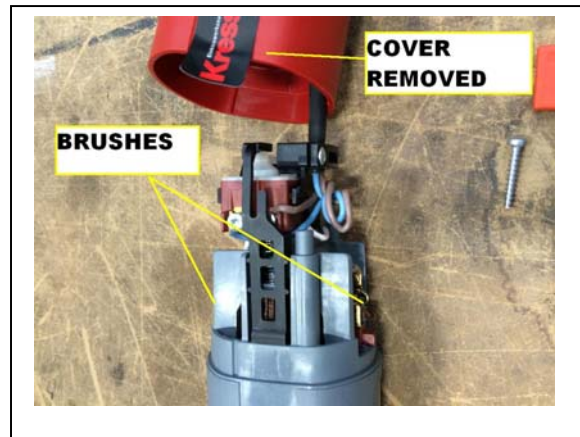

Inspect Brushes


Remove the clip off the top of the brush and pull out the brush. New brushes are 16mm long.

If the spring is unable to push the brush onto the rotor then it needs replacing.

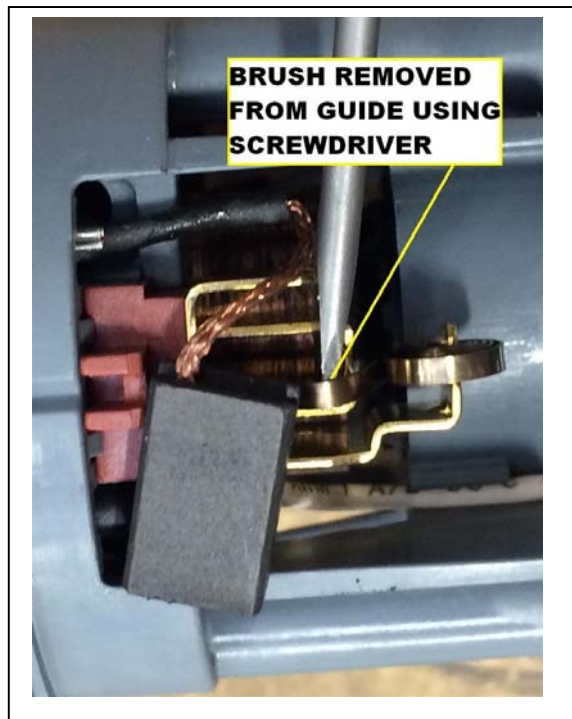

Remove the Brush and Replace

The spade crimp will pull out of the mounting hole quite easily but the replacement must be fitted in the slot shown.

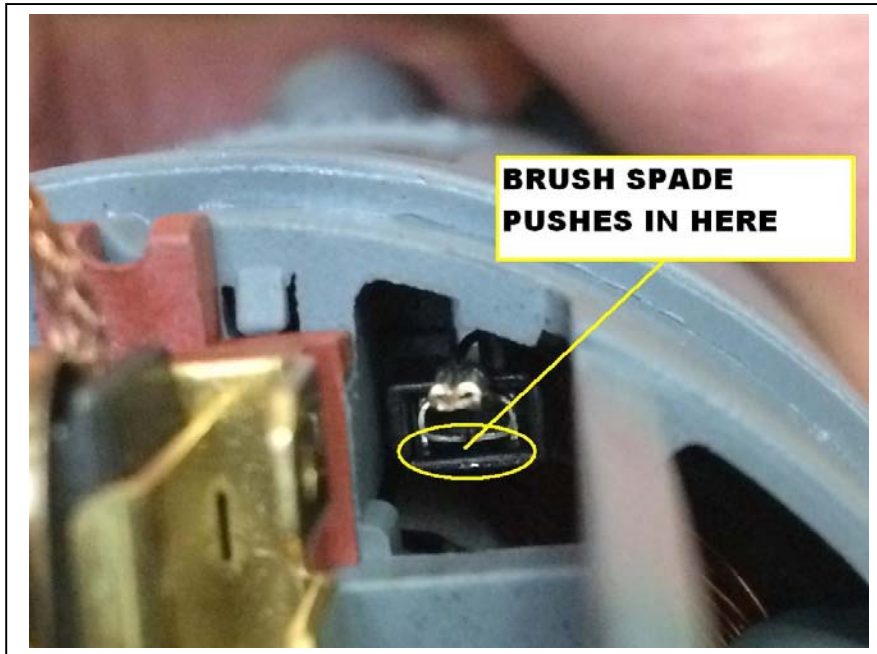

Reassemble in reverse order